
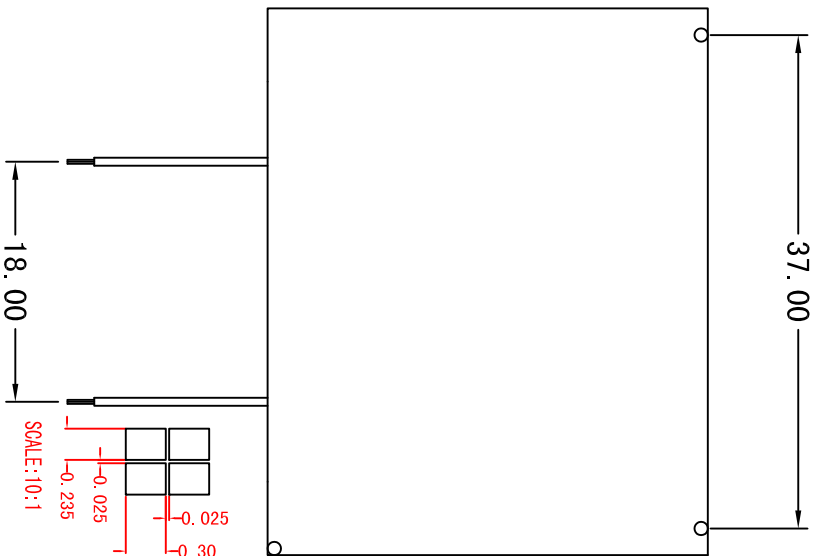
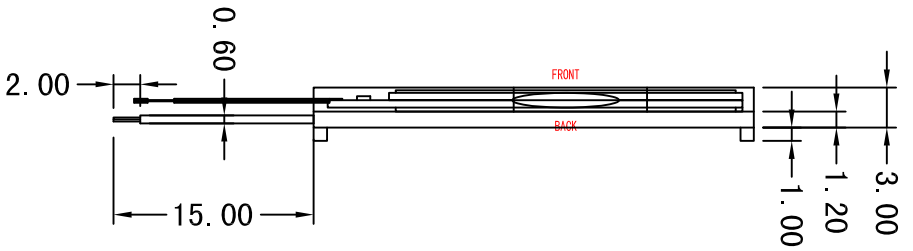


TO:

FROM: 焜新达技术部

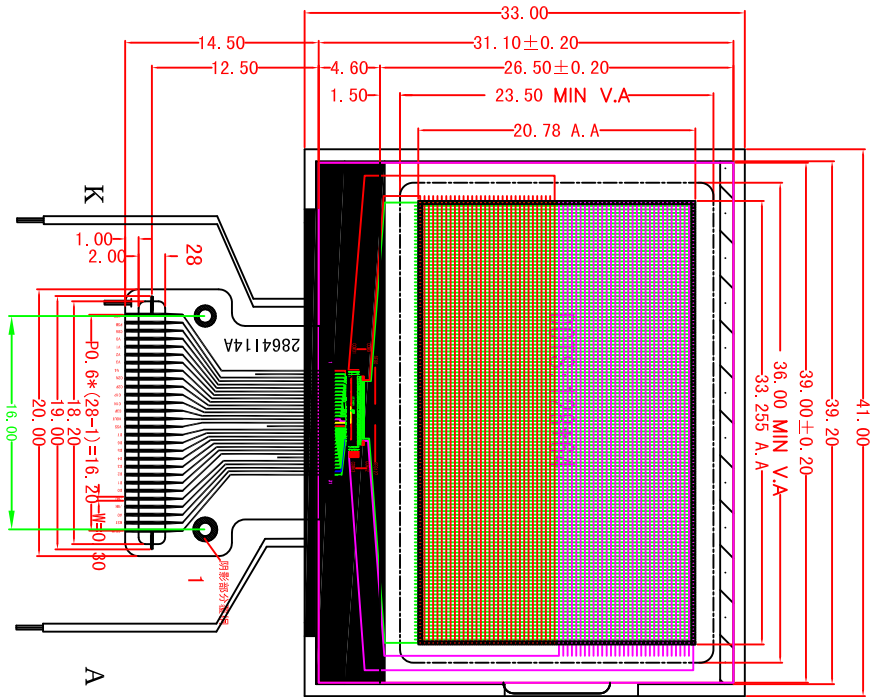

PIN	SYMBOL
1	CS1B
2	RST
3	A0
4	/MR
5	/RD
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VSS
15	YOUT
16	G3P
17	G1N
18	G1P
19	G2P
20	G2N
21	V4
22	V3
23	V2
24	V1
25	V0
26	G86
27	PSB
28	VDD

LCD-FSTN

VIEW ANGLE: 6 0'CLOCK

DRIVE MODE:1/64D,1/9B

DRIVE VOLTAGE: 9V

THE LCM: FPC+COG IC+LCD

DISPLAY MODE: HIGH-TRANSPARENT

OPERATE TEMP: -20°C TO +70°C

STORAGE TEMP: -30°C TO +80°C

DRIVING IC: 7565R

REVISION RECORD

1:

2:

3:

SHENZHEN YEXINDA INDUSTRY CO., LTD.

DRAWN BY: HGY

APPROVED:

DATE: 2013-06-27

LCM NO: YXD-12864114A

UNIT: mm

SHEET NO: 2 OF 2

REV A

A

B

C

D

8

7

6

5

4

3

2

1

8

7

6

5

4

3

2

1