


TO:

FROM: 烨新达技术部

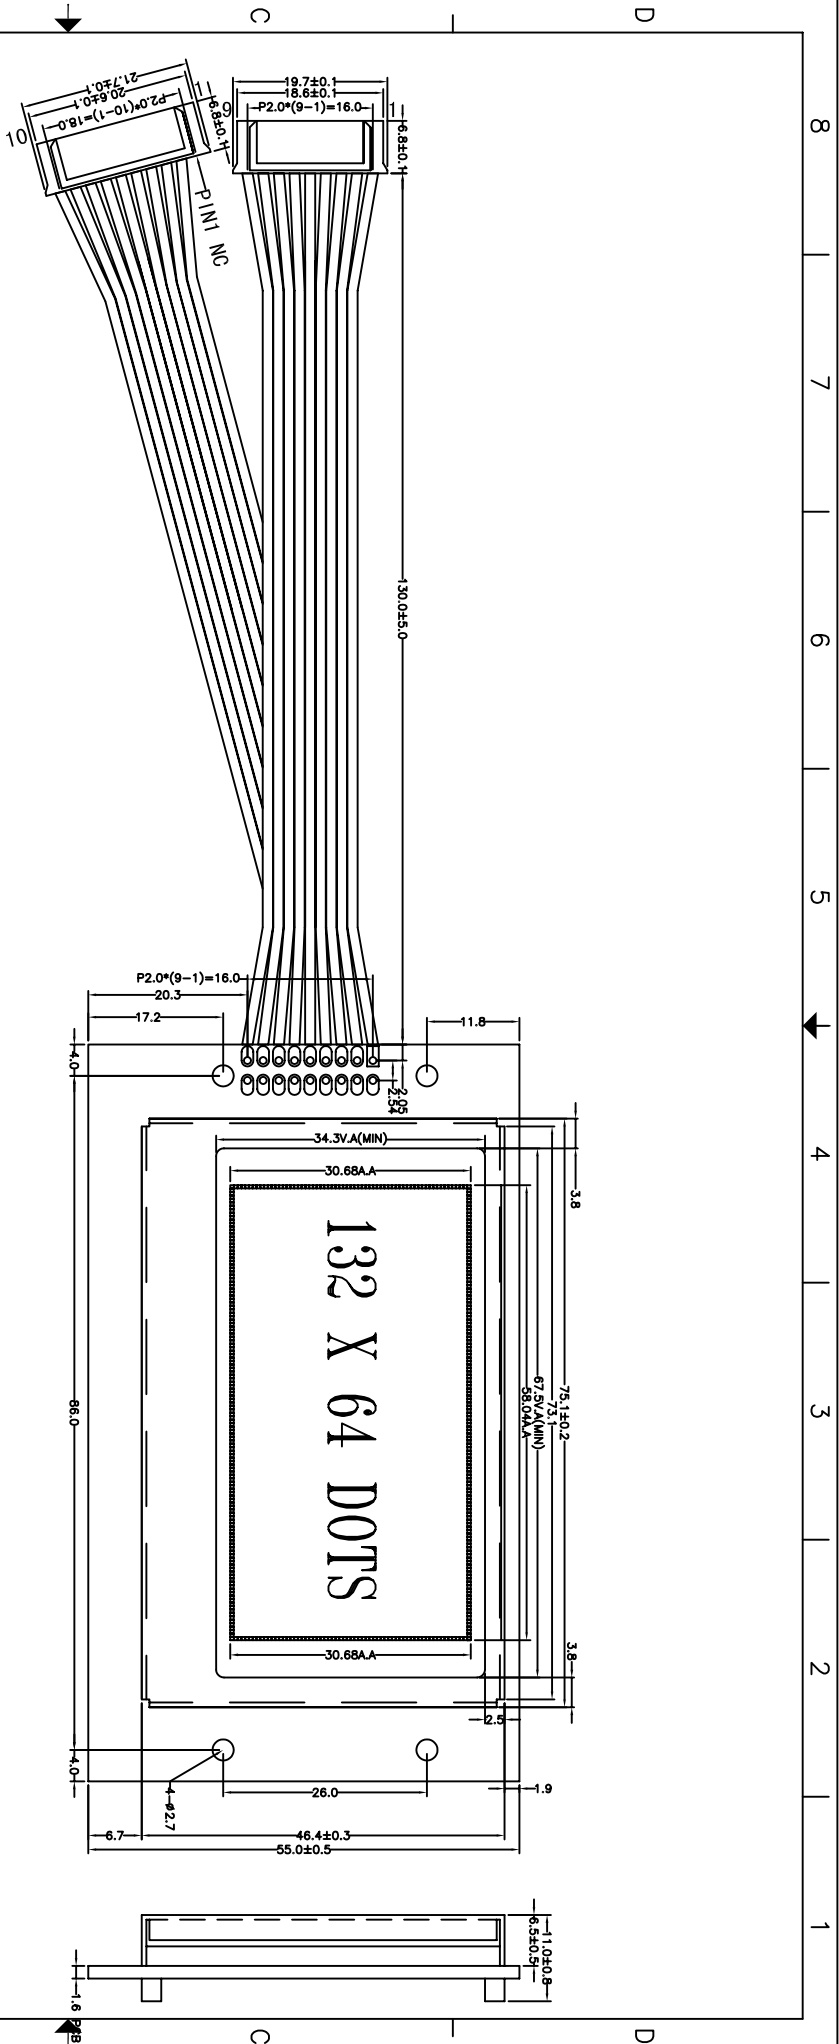

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
VDD	NC	R/W	/RST	DB0	DB2	DB4	DB6	LED+	VSS	E	A0	CS1	DB1	DB3	DB5	DB7	LED-
3.0V		H/L	L,H	TRI-STATE				5.0V	0V		H/L	L	TRI-STATE				0V

LCD-STN	
VIEW ANGLE: 6 0°CLOCK	DISPLAY MODE: POSITIVE/TRANSFLECTIVE
DRIVE MODE: 1/64D,1/9B	OPERATE TEMP: 0°C TO +50°C
DRIVE VOLTAGE: 9.0V	STORAGE TEMP: -10°C TO +60°C
CONNECTOR: AGW28	PRINTING: NO

REVISION RECORD	
1: 140.0±5.0->130.0	
2: 15.3->17.2	
3: AGW26->AGW28	

SHENZHEN YEXINDA INDUSTRY CO., LTD.	
DRAWN BY: LCY	LCM NO: YXD-13264B-C0G
APPROVED:	UNIT: mm
DATE: 2006-04-14	SHEET NO: 1 OF 2

REV	C
-----	---